



Electric Self-Propelled Scissor Lift

GS™-2668
GS™-3268

- Large capacity electric scissor lifts with excellent maneuverability.



Genie Industries

GS-2668 and GS-3268

- Heavy-duty square steel guardrails.
- Large platform with 60 in (1.52 m) roll-out extension and durable diamond plate aluminum flooring.
- High angle steering provides excellent maneuverability.

Standard Features


- GS-3268 has 38 ft (11.75 m) working height and GS-2668 has 32 ft (9.9 m) working height
- 60 in (1.52 m) roll-out platform extension
- 68 in (1.73 m) unit width
- 1,000 lb (454 kg) load capacity for the GS-3268 and 1,250 lb (567 kg) load capacity for the GS-2668
- Proportional drive
- Full proportional lift and single speed descent
- Multiple disc brakes
- Emergency stop switches at platform and ground controls
- Manual brake release
- Manual platform lowering valve
- Full height platform swing gate
- Non-marking tires
- AC wiring to platform
- Tilt sensor with an audible alarm
- Automotive-style horn
- Hour meter

Options and Accessories

- Motion alarm
- 2,000 watt inverter
- Air line to platform
- Platform work lights
- Dual flashing beacon
- Turf tires
- Rough terrain tires

Standards Compliance

- ANSI/SIA A92.6
- CSA CAN3-B354.2-M82
- CE compliance option
- AS 1418.10

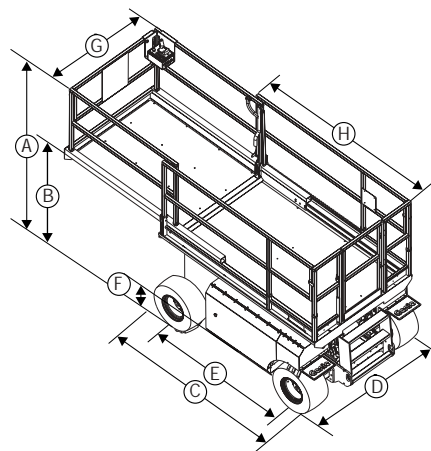

Specifications

Model	GS-2668		GS-3268	
	US	Metric	US	Metric
Working height*	32 ft	9.9 m	38 ft	11.75 m
Platform height	26 ft	7.9 m	32 ft	9.75 m
(A) Height - stowed (guardrails)	91 1/2 in	2.32 m	96 1/2 in	2.45 m
Height - stowed (guardrails lowered)	67 in	1.7 m	72 in	1.83 m
(B) Height - stowed (platform)	46 3/4 in	1.19 m	51 3/4 in	1.31 m
(C) Unit length - stowed	105 in	2.67 m	105 in	2.67 m
Unit length - platform extended	161 1/2 in	4.1 m	161 1/2 in	4.1 m
(D) Unit width	68 in	1.73 m	68 in	1.73 m
(E) Wheelbase	73 in	1.85 m	73 in	1.85 m
(F) Ground clearance	7 1/2 in	19 cm	7 1/2 in	19 cm
(G) Platform width	61 in	1.55 m	61 in	1.55 m
(H) Platform length - stowed	99 in	2.51 m	99 in	2.51 m
Platform length - extended	156 in	3.96 m	156 in	3.96 m
Roll-out platform extension	60 in	1.52 m	60 in	1.52 m
Lift capacity	1,250 lb	567 kg	1,000 lb	454 kg
Extension deck capacity	300 lb	136 kg	300 lb	136 kg
Turning radius - outside	145 in	3.68 m	145 in	3.68 m
Turning radius - inside	60 in	1.52 m	60 in	1.52 m
Power source	48V (8 6V 350AH batteries), both models			
Drive speed - stowed	3.0 mph	4.8 km/h	3.0 mph	4.8 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Raise/lower speed	30/35 sec		50/37 sec	
Controls	proportional		proportional	
Tires	9 - 21.5 in	23-55 cm	9 - 21.5 in	23-55 cm
Gradeability	30%		25%	
Occupied floor pressure	166 psf	680 kg/sq.m	181 psf	781 kg/sq.m
Tire contact pressure	86 psi	593 kPa	82 psi	565 kPa
Drive	dual front wheel, both models			
Multiple disc brakes	dual rear wheel, both models			
Weight	6,573 lb	2,982 kg	8,080 lb	3,665 kg

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

Distributed By:

Genie Industries