

RITCHIE Specs


Search over 15900 equipment specs

<u>Home</u>

Caterpillar 951C Crawler Loader

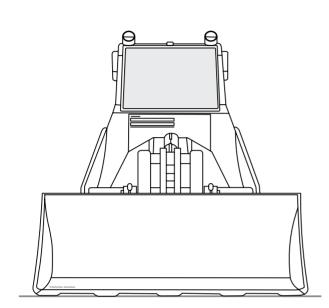

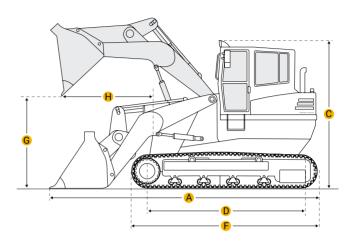

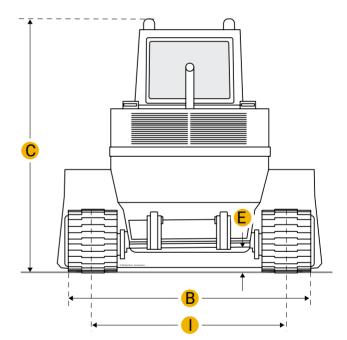

Units

Imperial Metric

Dimensions

Dimensions

A	Length With Bucket On Ground	15.67 ft in
E	Ground Clearance	1.32 ft in
В	Width To Outside Of Tracks	6.5 ft in

С	Height To Top Of Cab	9.42 ft in
G	Clearance At Full Height And Dump	9.09 ft in
Н	Reach At Dump Height	3.42 ft in
F	Length To Front Of Track	10.83 ft in
Undercarriage		
Ι	Track Gauge	60.04 in
D	Length Of Track On Ground	7.03 ft in
	Number Of Shoes Per Side	39
	Number Of Track Rollers Per Side	5
	Ground Contact Area	2356.01 in2
	Track Shoe Width	13.98 in
		13.20 11

Specifications

Engine	
Number Of Cylinders	4
Engine Make	2236
Engine Model	3304
Net Power	95 hp
Power Measured @	2200 rpm
Displacement	427.2 cu in
Operational	
Operating Weight	28071.5 lb
Fuel Capacity	52.1 gal
Cooling System Fluid Capacity	6.5 gal
Engine Oil Capacity	5 gal
Final Drive Fluid Capacity - Each	2.6 gal
Hydraulic System Fluid Capacity	19.5 gal
Static Tipping Load	18867.2 lb

Bucket Capacity - Struck1.6 yd3Bucket Capacity - Heaped1.8 yd3Poperating Voltage24 VAternator Supplied Amperage19 ampsMax Speed7.2 mphHydraulicVone-type pumpPump TypeVane-type pumpPamp Flow Capacity3.3 gal/minRelief Valve Pressure2500 psiDump Time2.4 secLower Time2.4 sec	Breakout Force - Std Bucket	15710 lb
Operating Voltage24 VAtternator Supplied Amperage19 ampsMax Speed7.2 mphHydraulicVane-type pumpPump TypeVane-type pumpPump Flow Capacity3.3 gal/minRelief Valve Pressure6.6 secDump Time2.4 sec	Bucket Capacity - Struck	1.6 yd3
Aternator Supplied Amperage19 ampsMax Speed.2 mphHydraulicVane-type pumpPump Type33 agal/minRelief Valve Pressure2500 psiRaise Time6.6 secDump Time24 sec	Bucket Capacity - Heaped	1.8 yd3
Max Speed7.2 mphHydraulicVane-type pumpPump TypeVane-type pumpPump Flow Capacity3.3 gal/minRelief Valve Pressure2500 psiRaise Time6.6 secDump Time2.4 sec	Operating Voltage	24 V
Hydraulic Pump Type Vane-type pump Pump Flow Capacity 3.3 gal/min Relief Valve Pressure 2500 psi Raise Time 6.6 sec Dump Time 2.4 sec	Alternator Supplied Amperage	19 amps
Pump TypeVane-type pumpPump Flow Capacity33.3 gal/minRelief Valve Pressure2500 psiRaise Time6.6 secDump Time2.4 sec	Max Speed	7.2 mph
Pump Flow Capacity33.3 gal/minRelief Valve Pressure2500 psiRaise Time6.6 secDump Time2.4 sec	Hydraulic	
Relief Valve Pressure2500 psiRaise Time6.6 secDump Time2.4 sec	Pump Type	Vane-type pump
Raise Time 6.6 sec Dump Time 2.4 sec	Pump Flow Capacity	33.3 gal/min
Dump Time 2.4 sec	Relief Valve Pressure	2500 psi
	Raise Time	6.6 sec
Lower Time 2.3 sec	Dump Time	2.4 sec
	Lower Time	2.3 sec

Compare similar models

Komatsu D50S-15	
Bucket Capacity - Heaped	1.8 yd3
Net Power	90 hp
Operating Weight	27227.1 lb
Komatsu D53S-15	
Bucket Capacity - Heaped	1.9 yd3
Net Power	110 hp
Operating Weight	28660.1 lb
Komatsu D50S-16	
Bucket Capacity - Heaped	1.9 yd3
Net Power	110 hp
Operating Weight	28450 lb

Find {{brand}} {{model}} {{category}} for Sale

See {{brand}} {{category}} for sale rbauction.com See {{brand}} {{category}} for sale ironplanet.com See {{brand}} {{category}} for sale mascus.com

Need help? Contact Us

English

Company	+
Popular Searches	+

Looking for equipment or trucks?

Ritchie Bros. sells more new and used industrial equipment and trucks than any other company in the world.

Equipment for sale on rbauction.com

Equipment for sale on ironplanet.com

Equipment for sale on mascus.com

Sell your equipment

© 2007-2018 RitchieSpecs Equipment Specifications Ritchie Bros. Auctioneers © <u>Privacy Statement| Terms of Use</u> OEM specifications are provided for base units. Actual equipment may vary with options.