



The PT-30 is the smallest and most maneuverable ASV™ compact track loader. It's sized to work in confined spaces, yet productive enough to reduce the need for hand labor. The PT-30 has very low ground pressure so it can work with minimal impact on finished lawns and landscaping. A wide range of performance-matched attachments make it ideal for many jobs.



PT-30 **COMPACT TRACK** **LOADER**

The PT-30 is the smallest and most maneuverable ASV compact track loader. It can work in confined or difficult to reach areas with the productivity of a crew of hand labor. Very low ground pressure lets the PT-30 work over soft, sensitive surfaces with minimal impact.

The PT-30 undercarriage uses 24 wheels to spread the machine's weight over the length and width of its rubber tracks. By using a maximum number of wheels, the weight per wheel is lower, track life is longer and traction is exceptional. Suspension of the undercarriage improves traction in virtually any ground condition while keeping the operator more comfortable throughout the day. With less ground pressure under its tracks than a person on foot, the PT-30 is ideal for work on fragile surfaces like lawns and landscaping.


The PT-30 is powered by a rugged and reliable 1.5 liter, 3-cylinder diesel engine and a time-proven hydrostatic powertrain that includes direct drive motors and unique sprockets with rotating sleeves. The sprockets mesh with the tracks' drive lugs for a highly efficient and smooth transfer of

power that let you breeze through tough, demanding jobs.

Operating the PT-30 is simple and comfortable from a seated position inside the protective ROPS/FOPS canopy. Optional cab enclosures can include a heater, sound insulation and wiper to let you work comfortably in inclement weather.

Ergonomic pilot-hydraulic joysticks let you operate the PT-30 with precision and minimal effort. Even a novice operator can become productive with the PT-30 in a very short time. A thumbswitch on the right-hand joystick gives you intermittent ON/OFF control of auxiliary hydraulics. A switch lets you select a continuous mode for full-time auxiliary hydraulic power.

The PT-30 can be outfitted with a wide range of loader-mounted attachments, each performance-matched so it connects easily and works productively. Included are buckets, rakes, a brush cutter, mowers, blades, a snow blower, backhoe, broom, land leveler, pallet forks and many more. Powered attachments connect easily to the PT-30's standard auxiliary hydraulic system.

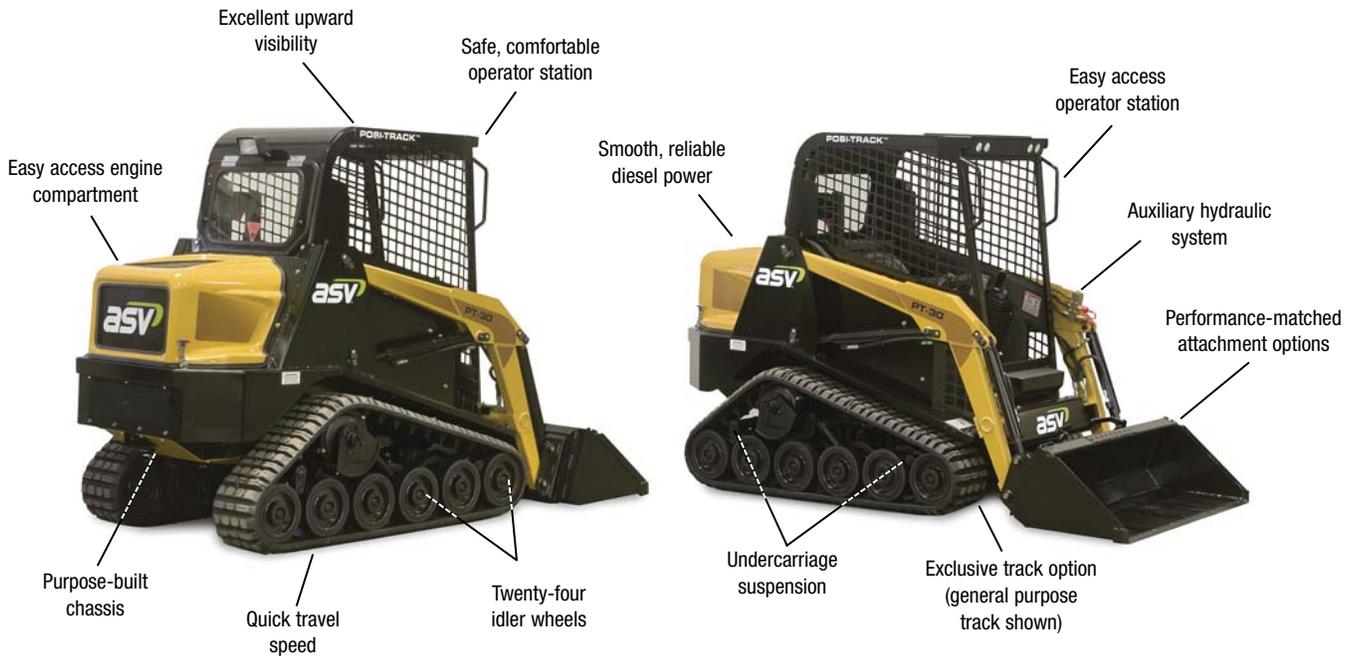

Standard tracks on the PT-30 are general purpose tracks that feature moderate treads for working in the widest range of ground conditions and applications. For applications that call for extreme care and protection of fragile surfaces, consider the optional Turf Tracks. These unique tracks offer excellent traction and operation on drier surfaces and have completely smooth surface for scuff-free performance and ultimate protection of turf, landscaping and similar surfaces.



Turf Track

STANDARD & OPTIONAL EQUIPMENT

STANDARD


- Air cleaner, dual stage
- Auxiliary hydraulic system
- Brake, parking
- Diesel engine, naturally-aspirated
- Heater, engine block
- Indicators: Eng. oil pressure, hot hyd. oil, engine temp and low battery
- Power management system
- Quick-connect hydraulic fittings
- Seat belt, 2-inch (50.8 mm) wide
- Tie-down loops, front/rear
- Alternator, 65-amp
- Battery, 750 CCA
- DC outlet, 12V
- Fuel gauge
- Hitch receiver
- Operator presence switch
- Pilot joystick controls
- Quick-attach, manual
- ROPS/FOPS canopy
- Suspended undercarriage
- Wiring, prewired for all optional accessories

OPTIONAL

- Back-up alarm
- Cab enclosure, with wiper
- Engine temperature gauge
- Horn
- Sound insulation kit
- Tachometer
- Window kit, rear
- Beacon, rotating
- Cab enclosure, with heater, insulation and wiper
- Seat belt, 3-inch (76 mm) wide
- Tracks, Turf (smooth tread)
- Window kit, side sliding

ATTACHMENTS

- Auger and bits
- Broom, rotary
- Dirt bucket
- Land leveller
- Multi-purpose bucket
- Sod roll installer
- Snow blade
- Trencher
- Backhoe and buckets
- Brush cutter, rotary
- Power box rake
- Light material bucket
- Pallet forks
- Snow blower
- Tiller

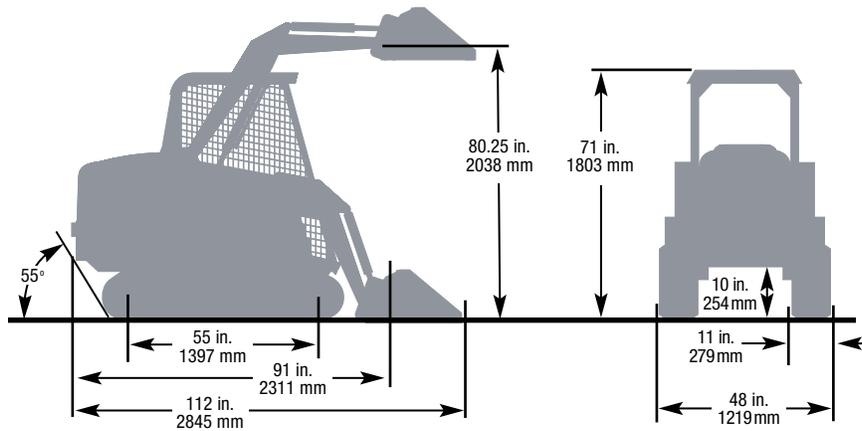

PT-30 SPECIFICATIONS & DIMENSIONS

MACHINE WEIGHT:

Operating weight:	3,305 lb. / 1500 kg.
Shipping weight, w/out bucket:	2,935 lb. / 1331 kg.
Ground pressure @ operating weight	2.8 psi / 19.2 kPa
Ground pressure @ shipping weight	2.5 psi / 17.2 kPa

TRACKS:

Track width:	11 in. / 279 mm
Track length, on ground:	55 in. / 1397 mm
Ground contact area:	1,183 in. ² / .76 m ²

AUXILIARY HYDRAULICS:

Flow, maximum:	10 gpm / 37.9 lpm
Pressure:	3,000 psi / 20 670 kPa

ENGINE:

Type (diesel, naturally-aspirated):	Perkins 403C-15
Displacement:	92 in. ³ / 1.5 L
Gross power @ 2800 rpm:	33.7 hp / 25.1 kW
Torque, peak:	64.39 ft-lb / 87 Nm
Emission controls:	meets all U.S. EPA Tier 3 standards

OPERATING SPECIFICATIONS:

Tipping load:	1,600 lb. / 726 kg
Operating capacity 50% tip load*:	800 lb. / 363 kg
Operating capacity 35% tip load*:	560 lb. / 254 kg
Travel speed, maximum:	6 mph / 9.4 kph

SERVICE REFILL CAPACITIES:

Fuel tank:	10 gal. / 37.9 L
Hydraulic tank:	8 gal. / 30.3 L
Engine coolant:	1.5 gal. / 5.6 L
Engine oil, inc. filter:	4 qts. / 3.8 L

* SAE J818 standards define operating capacities of rubber-tired skid steers (50% tipping load) and tracked loaders (35% tipping load). There are no standards defining the operating capacity of machines equipped with a suspended undercarriage or machines with rubber tracks.

Machines featured in photos may include additional equipment.

Specifications are subject to change without notice.